


SPECIFICATION CONTROL DRAWING

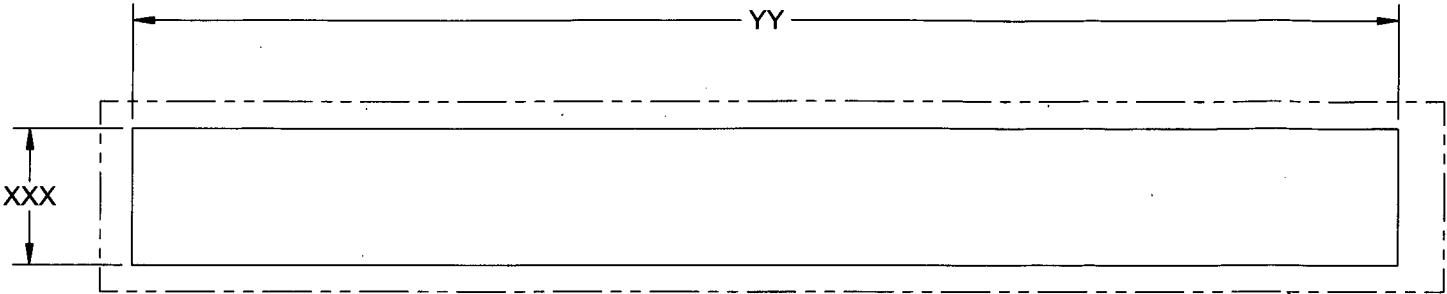

D4595-XXX-YY SEALANT TAPE

RELEASE BACKING, Ref.
DO NOT REMOVE UNTIL APPLICATION

RELEASED
2013-11-14
MP

- NOTES:**
- 1) MATERIAL: SEALANT TAPE, SINGLE-COMPONENT, NON-CURING, POLYSULFIDE BASE
1/16" THICK
PER MIL-S-11030F TYPE III
POSSIBLE SUPPLIER = GENERAL SEALANTS INC. P/N GS#424 (AVIALL)
 - 2) SPECIFICATION: D4595-XXX-YY
WHERE "XXX" = WIDTH IN HUNDREDTHS OF AN INCH
AND "YY" = LENGTH IN FEET
EG. 1 INCH WIDE BY 25 FEET LONG SEALANT TAPE = D4595-100-25
 - 3) TOLERANCES: PER DART QSI 018 UNLESS OTHERWISE NOTED
 - 4) UNITS: INCHES UNLESS OTHERWISE NOTED
 - 5) BREAK SHARP EDGES: N/A
 - 6) IDENTIFICATION: IDENTIFY WITH DART P/N "D4595-XXX-YY", B/N "BXXXXX" PER DART QSI 044 6.1
 - 7) WEIGHT: 0.33 lbs/sq.ft

B	REMOVE NOTE REGARDING TAPE EXPIRATION DATE. REF. PAR13-258.	ML	13.10.03
A	NEW ISSUE	CP	12.01.09
REV.	DESCRIPTION	BY	DATE
DESIGN	<i>93</i>	DART AEROSPACE LTD HAWKESBURY, ONTARIO, CANADA	
DRAWN	ML		
CHECKED	<i>[Signature]</i>	DRAWING NO.	REV. B
MFG. APPR.	N/A	D4595	SHEET 1 OF 1
APPROVED	<i>[Signature]</i>	TITLE	SCALE
DE APPR.	<i>[Signature]</i>	SEALANT TAPE	NTS
DATE	13.10.03	COPYRIGHT © 2013 BY DART AEROSPACE LTD THIS DOCUMENT IS PRIVATE AND CONFIDENTIAL AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT IS NOT TO BE USED FOR ANY PURPOSE OR COPIED OR COMMUNICATED TO ANY OTHER PERSON WITHOUT WRITTEN PERMISSION FROM DART AEROSPACE LTD.	